
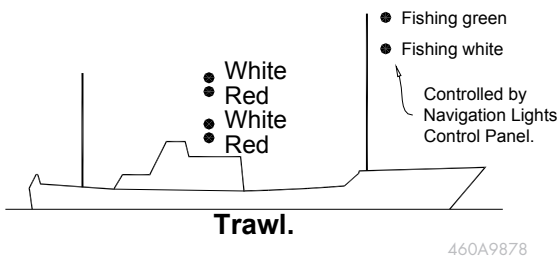


TEF 4614 CONTROL PANEL FOR TRAWLER- AND PURSE SEINER SIGNAL

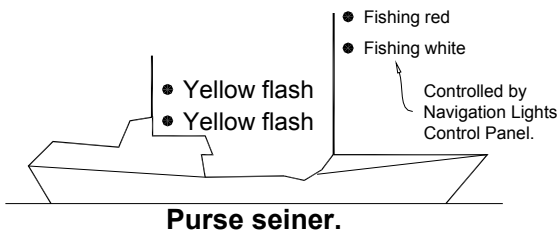

Rules at sea; Rule 26, enclosure II (shortened)

Additional signals for fishing vessels fishing close to other fishing vessels

Vessels trawling must have 2 white and 2 red lanterns mounted alternately directly one over another. These lanterns must indicate when the trawl is shooting, hauling and when the trawl is caught in an obstacle.

Vessels fishing with purse seiner, must show 2 lanterns with yellow light. One mounted directly over the other. these lanterns must flash alternately every second and with equally long light- and dark periods.

APPLICATION

- For control and protection of trawler- and purse seiner lights
- For flush mounting

FEATURES AND BENEFITS

- Easy installation
- Solid State flash circuits
- Control unit separated from power unit. Length of control cable is optional. Standard length is 2 meters
- Layout adapted to Tranberg's lantern control panels
- Dimmable indicator lights


TECHNICAL DATA

Material:	Blach anodised aluminium Engraved text
Supply voltage:	See flip side
Max load:	See flip side
Fuse:	Not included. See flip side
Enclosure:	IP20
Dimensions (WxHxD):	Control unit: 144 x 96 x 40 mm Main unit: 230 x 80 x 130 mm
Cut out control unit:	120 x 76 mm
Weight:	1,5 kg.

APPROVALS AND CERTIFICATES

NA

TEF 4614 CONTROL PANEL FOR TRAWLER- AND PURSE SEINER SIGNAL

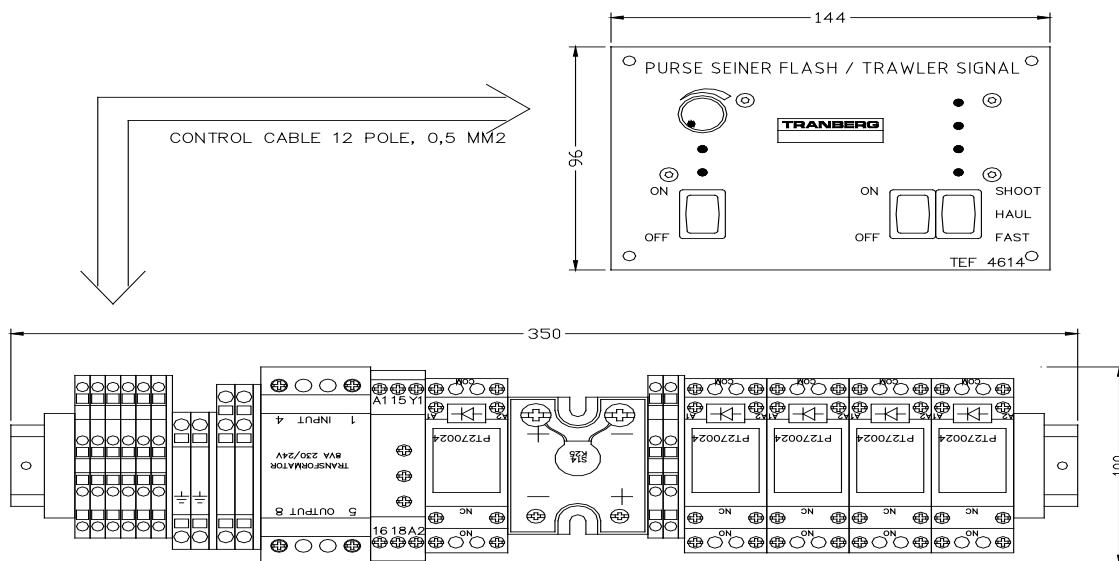

DESCRIPTION

	Supply voltage	Max load	Max fuse size	Part No.
Trawler signal and purse seiner	24V DC	6 x 80W	10A (Type B)	4614 100
Trawler signal and purse seiner	24V AC	6 x 80W	10A (Type B)	4614 150
Trawler signal and purse seiner	115V AC	6 x 200W	10A (Type B)	4614 200
Trawler signal and purse seiner	230V AC	6 x 200W	10A (Type B)	4614 300

DESCRIPTION

	Supply voltage	Max load	Max fuse size	Part No.
Trawler signal only	24V DC/AC	4 x 80W	10A (Type B)	4614 101
Trawler signal only	115V AC	4 x 200W	10A (Type B)	4614 201
Trawler signal only	230V AC	4 x 200W	10A (Type B)	4614 301

DESCRIPTION

	Supply voltage	Max load	Max fuse size	Part No.
Purse seiner flash only	24V DC	2 x 80W	10A (Type B)	4614 102
Purse seiner flash only	24V AC	2 x 80W	10A (Type B)	4614 152
Purse seiner flash only	115V AC	2 x 200W	10A (Type B)	4614 202
Purse seiner flash only	230V AC	2 x 200W	10A (Type B)	4614 302

OPTIONS

- Two set of output terminals
- Front plate with measures 192 x 96 mm. For adapting to Tranberg's lantern control panel with 192 mm width
- Optional length of control cable